


MINDEO



1D 2D

FCC CE RoHS

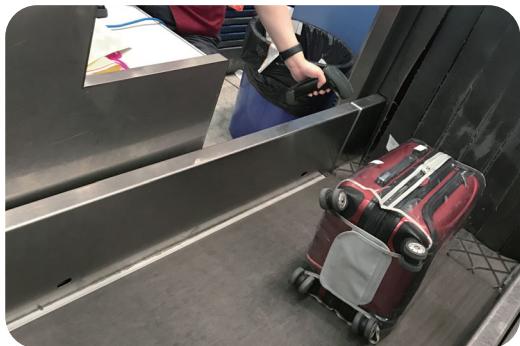

CS2290-BT Cordless Image Scanner

Features



- 1 Stylish and ergonomic design, small base saves installation space
- 2 Read all common 1D/2D barcodes from paper labels and electronic screens
- 3 Working range reaches up to 30 meters
- 4 Bluetooth is compatible with 4.2/3.0/2.1+EDR standard
- 5 Support batch mode capability (5000 EAN-13 barcodes)
- 6 Built-in rechargeable & replaceable battery, one full charge supports scanning for 25 hours or standby for 60 hours
- 7 Brand-new, easy wireless communication setting method guarantees convenient operation
- 8 Support vibration mode, ideal for both noisy and quiet environment
- 9 Soft white auxiliary lighting and green aiming cursor deliver comfortable and convenient scanning experience

CS2290-BT Specifications

Communication Characteristics																													
Working Range	30 meters (open air)																												
Radio Link	2.4-2.5 GHz, Bluetooth 4.2, Class 2																												
Mechanical Characteristics																													
Dimensions (L × W × D)	Handheld unit: 90.2 mm × 70 mm × 180 mm; Cradle: 118 mm × 89.5 mm × 74 mm																												
Weight	Handheld unit: 225 g; Cradle: 140 g (without cable)																												
Indicator	Handheld unit: LED, beeper, vibration; Cradle: LED																												
Interface	USB Keyboard, USB Virtual COM, RS232, PS/2 Keyboard																												
Electrical Characteristics																													
Input Voltage	DC 5 ± 0.25 V																												
Current	Handheld unit: 45 mA (standby), 600 mA (working) Cradle: 60 mA (working), 500 mA (charging, maximum)																												
Battery	2600 mAh Lithium-ion battery																												
Charge Time	6 hours																												
Standby Time	60 hours																												
Operating Time	25 hours (1 scan per 5 seconds)																												
Performance Characteristics																													
Image Size	1280 × 800 pixels																												
Field of View	Horizontal: 42°, vertical: 26.5°																												
Scanning Angle	±70°, ±75°, 360° (Skew, Pitch, Roll)																												
Print Contrast	20% minimum reflectance difference																												
Decoding Capability	1D: UPC-A, UPC-E, UPC-E1, EAN-13, EAN-8, ISBN (Bookland EAN), ISSN, Code 39, Code 39 full ASCII, Code 32, Trioptic Code 39, Interleaved 2 of 5, Industrial 2 of 5, Matrix 2 of 5, Codabar (NW7), Code 128, UCC/EAN 128, ISBT 128, Code 93, Code 11 (USD-8), MSI/Plessey, UK/Plessey, China Post, China Finance, GS1 DataBar (formerly RSS) variants 2D: PDF417, MicroPDF417, QR Code, Aztec Code, HanXin Code, DataMatrix, Micro QR, Coda block F Code, Maxicode																												
Minimum Resolution	HD: 1D (Code 39): 3 mil, 2D (QR): 5 mil SR: 1D (Code 39): 4 mil, 2D (PDF417): 6.7 mil																												
<table border="0"> <thead> <tr> <th></th> <th>High desity series (HD)</th> <th>Standard range series (SR)</th> </tr> </thead> <tbody> <tr> <td>3 mil Code39 (3 chars)</td> <td>10 mm – 61 mm</td> <td>/</td> </tr> <tr> <td>4 mil Code 128 (9 chars)</td> <td>5 mm – 88 mm</td> <td>55 mm – 106 mm</td> </tr> <tr> <td>13 mil UPC (6 chars)</td> <td>0 mm – 179 mm</td> <td>0 mm – 335 mm</td> </tr> <tr> <td>Decoding Depth</td> <td>20 mil Code39 (1 char)</td> <td>10 mm – 253 mm</td> </tr> <tr> <td></td> <td>5 mil QR (40 chars)</td> <td>7 mm – 65 mm</td> </tr> <tr> <td></td> <td>6.7 mil PDF417 (20 chars)</td> <td>0 mm – 105 mm</td> </tr> <tr> <td></td> <td>10 mil QR (20 chars)</td> <td>0 mm – 134 mm</td> </tr> <tr> <td></td> <td>20 mil QR (20 chars)</td> <td>0 mm – 215 mm</td> </tr> </tbody> </table>				High desity series (HD)	Standard range series (SR)	3 mil Code39 (3 chars)	10 mm – 61 mm	/	4 mil Code 128 (9 chars)	5 mm – 88 mm	55 mm – 106 mm	13 mil UPC (6 chars)	0 mm – 179 mm	0 mm – 335 mm	Decoding Depth	20 mil Code39 (1 char)	10 mm – 253 mm		5 mil QR (40 chars)	7 mm – 65 mm		6.7 mil PDF417 (20 chars)	0 mm – 105 mm		10 mil QR (20 chars)	0 mm – 134 mm		20 mil QR (20 chars)	0 mm – 215 mm
	High desity series (HD)	Standard range series (SR)																											
3 mil Code39 (3 chars)	10 mm – 61 mm	/																											
4 mil Code 128 (9 chars)	5 mm – 88 mm	55 mm – 106 mm																											
13 mil UPC (6 chars)	0 mm – 179 mm	0 mm – 335 mm																											
Decoding Depth	20 mil Code39 (1 char)	10 mm – 253 mm																											
	5 mil QR (40 chars)	7 mm – 65 mm																											
	6.7 mil PDF417 (20 chars)	0 mm – 105 mm																											
	10 mil QR (20 chars)	0 mm – 134 mm																											
	20 mil QR (20 chars)	0 mm – 215 mm																											
Environmental Characteristics																													
Temperature	-20° to 50°C (-4° to 122°F), operating; -40° to 60°C (-40° to 140°F), storage																												
Humidity	5% to 95% (non-condensing)																												
Safety	EMC: EN55032, EN55035 Electrical Safety: EN62368-1 Photobiological Safety: EN62471:2008 Illumination: 0~100,000 LUX Protection Class: IP51 Drop Resistance: Withstands multiple 1.5 m (5 ft.) drops to concrete																												

[Notice]: Specifications are subject to change without notice.



Shenzhen MinDe Electronics Technology Ltd.